


Automatic Spray Gun WA 200

NEW Surface Treatment



- Fluid needle packing cartridge in Rulon.
- Fluid nozzle + fluid needle set in stainless steel.
- Fluid nozzle + fluid needle set in tungsten carbide available.
- Gun body insert in stainless steel.
- New surface treatment: Electroless Ni-P alloy.

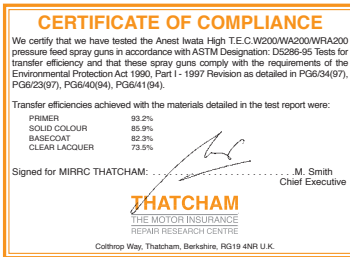

CE Ex II 2 G X



TECHNICAL SPECIFICATIONS

Model	\varnothing mm	bar	l/min	ml/min	mm	No.	g			
WA200 062	0.6	2.0	270	255	280	LV2	500			
WA200 084	0.8									
WA200 104	1.0									
WA200 124	1.2									
WA200 154	1.5									
WA200 082P	0.8	3.0	530	500	400	G2P				
WA200 102P	1.0									
WA200 122P	1.2									
WA200 152P	1.5					330		270	340	K2
WA200 202P	2.0					360		400	320	R2
WA200 251P	2.5					360	500	330	W1	

Max. Working Pressure: 6.8 bar (98 PSI)
Temperature range: 5~40° C

Noise Level (LAeqT): 81.2 dB (A)
Air Nipple: G 1/4" Fluid Nipple: G 3/8"

Distributed by: